

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 December 2002 (12.12.2002)

PCT

(10) International Publication Number
WO 02/099393 A2

(51) International Patent Classification⁷: G01N 21/00

(21) International Application Number: PCT/US02/01091

(22) International Filing Date: 15 January 2002 (15.01.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/874,740 5 June 2001 (05.06.2001) US

(71) Applicant: RIO GRANDE MEDICAL TECHNOLOGIES, INC. [US/US]; Suite 217, 800 Bradbury S.E., Albuquerque, NM 87106 (US).

(72) Inventors: ROWE, Robert, K.; 229 Ashley Lane, Corrales, NM 87048 (US). CORCORAN, Stephen, P.; 437 Alamos Road, Corrales, NM 87048 (US). HENDEE, Shonn, P.; 12205 San Victorio N.E., Albuquerque, NM 87111 (US).

(74) Agents: CROMPTON, David, M. et al.; Crompton, Seager & Tufte, LLC, Suite 895, 331 Second Avenue South, Minneapolis, MN 55401-2246 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD OF BIOMETRIC DETERMINATION USING SPECIALIZED OPTICAL SPECTROSCOPY SYSTEMS

(57) Abstract: Methods and apparatus for performing biometric determinations using optical spectroscopy of tissue. The biometric determinations that are disclosed include determination or verifications of identity, estimation of age, estimation of sex, determination of sample liveness and sample authenticity. The apparatuses disclosed are based upon discrete light sources such as light emitting diodes, laser diodes, vertical cavity surface emitting lasers, and broadband sources with multiple narrow-band optical filters. The multiple light sources are encoded in a manner that the tissue response for each source can be efficiently measured. The light sources are spaced at multiple distances from a detector to contribute differing information to the biometric determination task as do light sources with different wavelength characteristics. Apparatuses are disclosed that incorporate a spectral biometric sensor with a personal electronic device such as cellular telephones, personal digital assistants, wristwatches, electronic fobs for the purpose of providing secure biometric access to protected property.

WO 02/099393 A2

APPARATUS AND METHOD OF BIOMETRIC DETERMINATION USING SPECIALIZED OPTICAL SPECTROSCOPY SYSTEMS

Cross Reference to Related Patents and Pending Applications

5 This application is related to U.S. Patent Application Serial No. 09/832,534,
filed April 11, 2001, entitled "Apparatus and Method of Biometric Identification or
Verification of Individuals using Optical Spectroscopy", which is a continuation-in-
part of U.S. Patent Application Serial No. 09/415,594, filed October 8, 1999, entitled
"Apparatus and Method for Identification of Individuals by Near-Infrared Spectrum";
10 which is related to U.S. Patent Application Serial No. 09/174,812, filed October 19,
1998, entitled "Method for Non-Invasive Analyte Measurement with Improved
Optical Interface"; and U.S. Patent Application Serial No. 08/871,366, filed June 9,
1997, entitled "Diffuse Reflectance Monitoring Apparatus", all assigned to the same
assignee as the present application, and the disclosures of which are incorporated
15 herein by reference.

Technical Field

 This present invention relates generally to methods and systems for
performing biometric determinations of individuals utilizing optical spectra of tissue.
More specifically, the invention relates to methods and systems for determining or
20 verifying identity, determining or verifying age, determining or verifying sex, and
determining or verifying liveness and authenticity of the sample being measured. The
present invention discloses methods and systems for gathering optical information
about the tissue using a combination of wavelengths and source-detector separations.
The present invention discloses a family of compact, special-purpose optical sensors
25 operating in the near- ultraviolet, visible, and near-infrared spectral regions that are
suitable for a variety of biometric determination tasks. The sensors can be used in
stand-alone, dedicated applications or can be incorporated in a variety of personal
devices such as cellular telephones, personal digital assistants, wrist watches, or
electronic fobs to provide personal biometric security to protect access to a variety of
30 protected property.

Background of the Invention

 Biometric determination is generally defined as the process of measuring and
using one or more physical or behavioral features or attributes to gain information
about identity, age, or sex of a person, animal, or other biological entity. As well, in

order to ensure security, the biometric determination task may include further tasks that ensure that the sample being measured is authentic and being measured on a living being. This latter test is referred to as a determination of liveness.

There are two common modes in which biometric determinations of identity occur: one-to-many (identification) and one-to-one (verification). One-to-many identification attempts to answer the question of, "do I know you?" The biometric measurement device collects a set of biometric data and from this information alone it assesses whether the person is a previously seen ("authorized") individual. Systems that perform the one-to-many identification task, such as the FBI's Automatic Fingerprint Identification System (AFIS), are generally very expensive (\$10 million or more) and require many minutes to detect a match between an unknown sample and a large database containing hundreds of thousands or millions of entries. The one-to-one mode of biometric analysis answers the question of, "are you who you say you are?" This mode is used in cases where an individual makes a claim of identity using a user name, a personal identification number (PIN) or other code, a magnetic card, or other means, and the device collects a set of biometric data which it uses to confirm the identity of the person.

Although in general the one-to-many identification task is more difficult than one-to-one, the two tasks become the same as the number of recognized or authorized users for a given biometric device decreases to just a single individual. Situations in which a biometric identification task has only a small number of entries in the authorization database are quite common. For example, biometric access to a residence, to a personal automobile, to a personal computer, to a cellular telephone, and to other such personal devices typically require an authorization database of just a few people.

Biometric identification and verification is useful in many applications. Examples include verifying identity prior to activating machinery or gaining entry to a secure area. Another example would be identification of an individual for matching that individual to records on file for that individual, such as for matching hospital patient records especially when the individual's identity is unknown. Biometric identification is also useful to match police records at the time a suspect is apprehended, but true identity of the suspect is not known. Additional uses of biometric identification or verification include automotive keyless start and entry

applications, secure computer and network access applications, automated financial transaction applications, authorized handgun use applications, and time-and-attendance applications. In general, protected property will be the term used to describe all of the goods, places, services, and information that may require biometric
5 authorization to access.

Current methods for biometric identification are manifold, but some of the most common techniques include fingerprint pattern matching, facial recognition, hand geometry, iris scanning, and voice recognition. Each of these technologies addresses the need for biometric identification to some extent. However, due to cost,
10 performance, or other issues, each of the existing methods has advantages and disadvantages relative to the other technologies.

There are currently many personal electronic devices that are used to gain access to protected property but that do not include any biometric capability. For example, electronic fobs are commonly used to gain entry to automobiles and to
15 activate commercial and residential alarm systems. Wristwatches such as the Swatch Access models can be used to purchase and download codes that allow easy entry to ski areas and other for-pay recreational sites. A wristwatch being sold by Xyloc permits access to computers, printers, networks, or other properly equipped hardware and systems when the watch is in the vicinity of the protected system. A small
20 electronic device known as an iButton sold by Dallas Semiconductor can be put into a ring, key fob, wallet, watch, metal card or badge, that a person can carry and use to gain access to properly equipped doors and other protected systems. However, an unauthorized user can gain access to any of the property protected by these systems by simply obtaining a device from an authorized user. These devices do not have the
25 capability to distinguish between authorized and unauthorized users and will work for anyone who possesses them. This deficiency represents a major security concern.

In U.S. Patent No. 6,041,410, Hsu et al. disclose a personal identification fob that employs fingerprint data. This system is specified to contain memory to hold the fingerprint image, an image correlater, a communication means employing a cyclic
30 redundancy code, and a "door" that is controlled by the biometric system and allows access to protected property. Hsu et al. generalize "door" as a means to access protected property including a building, a room, an automobile, and a financial account. The method disclosed relates to a door that protects property and its

interaction with the fob, including a "wake-up" message and a series of steps to collect the biometric data and compare it with reference data, determining a match, and then actuating the device to provide access through the door.

One company that currently sells a personal identification unit is affinitex, a
5 division of AiT, and the product name is VeriMe. Because of the size of the fingerprint reader incorporated in the VeriMe product as well as the batteries and control electronics, the unit is relatively large and is intended to be hung around the neck like a pendant. In contrast, a long-standing desire of many in the biometric community is a biometric technology that can be discretely incorporated in a piece of
10 jewelry such as a wristwatch (for example, see Biometrics; Advanced Identity Verification, Julian Ashbourn, Springer, 2000, pp. 63-4).

There are a number of known biometric products and technologies that rely on optical images of various tissue sites to perform a biometric determination. For example, in U.S. Patent No. 4,537,484, Fowler, et al. describe an apparatus for
15 collecting a fingerprint image using optical techniques. In U.S. Patent No. 6,175,407, Sartor describes an apparatus for collecting a palm image using optical techniques. In U.S. Patent No. 5,291,560, Daugman describes a method for collecting and processing an optical image of the iris. In U.S. Patent No. 5,793,881, Stiver et al. describe a system and method for collecting an image of the subcutaneous structure of
20 the hand using an imaging methodology. However, all of these technologies generate and use images of the tissue as the basis for a biometric determination. The use of imaging generally requires high-quality expensive optical systems and an imaged region that is of sufficient size to capture the necessary biometric detail. If the imaged region is made too small, the biometric performance of these imaging systems
25 degrade. For this reason, contact imaging systems such as fingerprint and palm readers require a relatively large, smooth, accessible surface, limiting the range and form of products in which such systems can be incorporated. Finally, because the determination of a match between enrolled images and the test images is dependent on the orientation of the two images, such biometric systems have to correct for these
30 positional effects. For this reason, biometric systems that rely on imaging techniques require a significant computational power and a sophisticated algorithm to correct for image displacements, rotations and distortions, which leads to increased system cost and increased time required for user authentication.

As an alternative to imaging techniques, the use of spectral information for biometric determinations is disclosed in U.S. Patent Application Serial No. 09/832,534, filed April 11, 2001, entitled "Apparatus and Method of Biometric Identification or Verification of Individuals using Optical Spectroscopy", which is a continuation-in-part of U.S. Patent Application Serial No. 09/415,594, filed October 8, 1999, entitled "Apparatus and Method for Identification of Individuals by Near-Infrared Spectrum". The equipment used to perform the measurements disclosed in these applications was based on relatively large and expensive multi-purpose laboratory-grade commercial spectrometers. The family of techniques disclosed in these applications is referred to as spectral biometrics. The disclosures of these applications are incorporated herein by reference.

It is well known that tissue spectra are generally affected by both the absorption and scattering properties of the tissue. For many spectral measurement applications the portion of the measured spectra that represent the absorption characteristics of the tissue are more important for the measurement rather than the effects due to scatter. One technique for separating the two effects is known as radially resolved diffuse reflectance spectroscopy, which is based on collecting multiple measurements with different source-detector separation distances. This collection of data provides enough information to estimate and separate effects due to scatter and absorption (see Nichols, et al., Design and Testing of a White-Light, Steady-State Diffuse Reflectance Spectrometer for Determination of Optical Properties of Highly Scattering Systems, Applied Optics, 1 January 1997, 36(1), pp 93-104.). Although the use of multiple source-detector separations is a well-known technique for analyte measurements in biological samples, the use of similar measurement configurations for spectral biometric determinations has not been previously disclosed.

There is a need for an inexpensive, rugged and small spectrometer to perform spectral biometric determinations. One method that can be used to construct such spectrometers is based on using multiple discrete light sources such as light emitting diodes (LEDs), laser diodes, vertical cavity surface emitting lasers (VCSELs), and narrow band optical filters coupled to a broad-band optical source such as an incandescent bulb or blackbody emitter, operating at different wavelengths to illuminate and measure the optical properties of the sample at each of these

wavelengths. These types of spectrometers are known and used for collecting spectrometric information for many applications. For example, in U.S. Patent No. 3,910,701, Henderson et al. disclose a spectrometer that incorporates a plurality of LED sources for measuring a variety of biological samples. In U.S. Patent No. 4,857,735, Noller discloses a spectrometer using one or more LEDs to measure solution samples. In U.S. Patent No. 5,257,086, Fately et al. disclose an optical spectrometer having a multi-LED light source incorporating Hadamard or Fourier frequency encoding methods. However, there is a need for a small, rugged, and inexpensive spectrometer with designs that are optimal for biometric determinations.

As part of the biometric determination task, there is a need for ensuring that the sample being used for the biometric determination is alive. For example, U.S. Patent No. 5,719,950 to Osten et al. disclose a method and system to combine a biometric-specific measurement such as fingerprints, palm prints, voice prints, etc with a separate measurement of a non-specific biometric parameter such as skin temperature, pulse, electrocardiogram or tissue spectral features to ensure the liveness of the sample.

In addition to performing a biometric identification or verification and ensuring that the sample being measured is living tissue, there may also exist a need to determine an estimate of the age, sex, and other demographic characteristics of the person under test as part of the biometric determination task. For example, the U.S. Federal Trade Commission recently established a commission to examine the issue of remotely determining age of a person who is attempting to access a web site in order to block access by children to inappropriate sites. The Commission on Online Child Protection (COPA) heard testimony on June 9, 2000 that indicated that then-known biometric techniques could not be used to aid the determination of a person's age based on any known biometric features.

Summary of the Invention

Detailed embodiments of the present invention are disclosed herein. However, it is to be understood that the disclosed embodiments are merely exemplary of the present invention, which may be embodied in various systems. Therefore, specific details disclosed herein are not to be interpreted as limiting, but rather as a basis for the claims and as a representative basis for teaching one of skill in the art to variously practice the invention.

The present invention is based on Applicant's recognition that an accurate, precise and repeatable tissue spectra of an individual including selected wavelengths in the near ultraviolet range, visible range, very near infrared range or near infrared range and combinations of selected wavelengths from these ranges contains spectral features and combinations of spectral features which are unique to that individual. The spectral range over which biometric determinations have been demonstrated span wavelengths from 350nm to 2500nm, although it is likely that similar capabilities exist outside of this range.

The choice of which measurement wavelengths to use is driven in part by the availability and cost of suitable illumination sources and detectors. In the case of the discrete light sources disclosed in this application, the most common and least expensive optical components work with light in the wavelength region from 350-1000nm. Such a system can be constructed from silicon detector material and readily available LEDs, laser diodes, VCSELs, or optical filters coupled to a bulb. However, other detectors and other light sources could also be used as alternative components or to span a greater spectral range or a different spectral range.

The present method and apparatus also provides for biometric determination of whether a sample being measured is living tissue, known as a "liveness" determination. Further, the present system maintains high system security because the biometric device ensures that the exact sample it is operating on is real and alive, in addition to matching the properties of the enrolled data. Thus, an accurate determination of liveness precludes the use of simulated body parts and/or parts that have been removed from authenticated individuals. It has been found that the spectroscopic signature of living tissue is substantially different than most other media (including dead tissue), and thus liveness determination is an integral part of the present biometric device and method.

The present method and apparatus can also be used to estimate or verify the age of a person undergoing the biometric measurement. Further, the present method and apparatus can be used to estimate or verify the sex of the person undergoing the biometric measurement.

A variety of embodiments are disclosed herein for a sensor apparatus that can obtain tissue spectra that can be utilized for biometric identification determinations, liveness determinations, age determinations and sex determinations. These

embodiments of the present invention are amenable to miniaturization and ruggedization for incorporation in a variety of systems. Such fixed-installation applications include, but are not limited to, physical entry assurance to workplaces, homes, hotels, secure industrial areas and other controlled sites; time and attendance
5 monitoring; automotive applications such as keyless entry, keyless start, automotive personality setting, and mobile internet access; personal computer and network security; secure health record access; automated financial transactions; and authorized handgun use.

In addition to the fixed-system applications, the apparatus and methods
10 disclosed in this application can be used in small personal biometric packages such as smart cards, electronic fobs or wristwatches that the user/owner/wearer can carry with them and provide biometrically-assured authorization to a variety of devices and systems. Such personal biometric systems act as keys that provide access to protected property only if activated by the authorized individual, and reduces or eliminates
15 entry to the protected system by unauthorized people. Thus, the personal biometric devices of the present invention become a type of smart key that allow access to any system that interfaces to such device and for which the holder is authorized to access. Such systems and uses can include, but are not limited to, personal computers, network access devices, doors in office buildings and private residences, time-and-
20 attendance systems, automobiles, security equipment, automated financial transactions, cellular telephones, toll booths, electronic vending machine transactions and pay-per-entry events such as movies, etc.

Alternatively, as personal electronics such as personal digital assistants (PDA) and cellular phones become integrated in a variety of wireless applications, the
25 present invention provides a means to confirm the identity of the person using the device. This can be important when wireless applications such as mobile commerce use such devices to authorize monetary transfers or make purchases, while also allowing access to medical records and act as an electronic key for homes, offices and automobiles. By providing an integrated, compact, rugged, secure biometric
30 system that can be used to confirm the identity of a person attempting to use the PDA to access protected property, the present invention provides a capability that is applicable in many everyday life situations.

In addition to the application of the spectral biometric sensor as a single biometric, the sensor and identification methods disclosed in this application can also be used in conjunction with other biometric techniques within a system to either increase the accuracy of the system or increase the robustness of the system. In cases
5 where greater system security is required, the spectral biometric technique may be combined with one or more other biometric methods and the results can be combined to ensure a person's identity. Alternatively, the disclosed systems and methods can be combined with other biometric techniques to offer more than one method to identify a person in case one method is disabled due to system failure or other reason, ensuring a
10 more robust system performance overall.

One system for performing biometric determinations includes: an optical sensor head consisting of one or more monochromatic illumination sources, one or more detectors, and an optical sampler, all arranged such that there exists a plurality of source-detector spacings or a plurality of different monochromatic wavelengths, or
15 both; a light-source encoding system; a microprocessor with an input and output device; a database including selected tissue spectral data for authorized persons or a collection of spectral data for individuals against which unknown individual's would be checked; and a program running in the microprocessor for discriminating between a target individual's spectral data and the authorized spectral data or collection of
20 spectra database containing spectra for a group of individuals. The program can include software for performing an analysis for liveness determination, age determination, and sex determination based on the measured spectral data.

These and various other advantages and features of novelty which characterize the present invention are pointed out with particularity in the claims annexed hereto
25 and forming a part hereof. However, for a better understanding of the invention, its advantages, and the object obtained by its use, reference should be made to the drawings which form a further part hereof, and to the accompanying descriptive matter in which there are illustrated and described preferred embodiments of the present invention.

30 Brief Description of the Drawings

In the drawings, in which like reference numerals indicate corresponding parts or elements of preferred embodiments of the present invention throughout the several views:

Figure 1 is a perspective view of a spectral biometric sensor head in one preferred embodiment;

Figure 2 is a schematic cross-sectional view of the biometric sensor element coupled to the skin surface showing multiple mean optical paths;

5 Figure 3 is a schematic top view of the biometric sensor incorporating multiple light sources arranged with variable source-detector distances;

Figure 4 is a schematic representation of the top view of an alternative biometric sensor incorporating multiple light sources arranged with a common source-detector distance;

10 Figure 5 is a schematic top view of an alternative biometric sensor incorporating multiple light sources and a waveguide/aperture plate to provide variable source-detector distances;

Figure 6 is a schematic top view of an alternative biometric sensor including multiple light sources and multiple detectors providing variable source-detector
15 separations;

Figure 7 is a schematic top view of an alternative biometric sensor incorporating multiple light sources and a detector array for providing variable source-detector separations;

20 Figure 8 is a schematic representation of a personal biometric sensor built into a key fob;

Figure 9 is a schematic representation of a watch including a personal biometric sensor built into a back faceplate of the watch;

Figure 10 is a schematic of a laboratory spectrometer system that was used to perform experiments to confirm performance of spectral biometric devices;

25 Figure 11 is a schematic diagram of an end view of a dual-path fiber optic sampler;

Figure 12 is a graph depicting receiver-operator characteristics for the dual-path sampler of Figure 11;

30 Figure 13 is a graph depicting equal error rates for the dual-path sampler analysis using variable numbers of discrete spectral elements;

Figure 14 graphically depicts experimental results for age prediction utilizing an embodiment of the present invention;

Figure 15 graphically depicts experimental results for a sex prediction utilizing an embodiment of the present invention;

Figure 16 graphically depicts sex prediction ability versus the portion of data determined to be ambiguous;

5 Figure 17 graphically depicts the results of liveness testing; and

Figure 18 further details the liveness testing depicted in Figure 17.

Detailed Description of the Preferred Embodiments

Detailed embodiments of the present invention are disclosed herein. However, it is to be understood that the disclosed embodiments are merely exemplary of the present invention which may be embodied in various systems. Therefore, specific
10 details disclosed herein are not to be interpreted as limiting, but rather as a basis for the claims and as a representative basis for teaching one of skill in the art to variously practice the invention.

The present invention is based on Applicant's recognition that an accurate, precise and repeatable tissue spectrum of an individual in the near ultraviolet range, visible range, very near infrared, or near infrared spectral range and combinations of
15 these ranges contains spectral features and combinations of spectral features which are unique to that individual. The present invention is further based on a recognition that proper analysis, utilizing discriminant analysis techniques, can identify these
20 unique features or combinations, which are not readily apparent in visual analysis of a spectral output, so that an individual's identity may be determined by comparison of tissue spectral data taken at the time of use and compared to stored tissue spectral data from prior measurement.

In addition, the tissue spectrum has been found to not only contain information
25 that is unique to an individual, but also contains numerous features and combinations of features that indicate whether such spectral samples were taken while the sample was alive or not. The physiological effects that give rise to spectral features that indicate the state of a sample (alive or dead) include but are not limited to blood perfusion, temperature, hydration status, glucose and other analyte levels, and overall
30 state of tissue decay. Thus, the biometric identification and verification methods of the present invention can be also used in conjunction with, or separately from, the determination of the state of the liveness of the tissue. Tissue from other biological systems (organs, animals, etc.) has also been found to have spectral characteristics

that are distinctly different from human skin due to differences in the tissue composition and form. Thus, the biometric identification methods of the present invention can be also used in conjunction with or separately from the determination of whether the sample is human skin or some other tissue. In addition, it has been found
5 that tissue-like substances such as collagen gelatin, latex, water solutions, or others have spectral characteristics that are distinctly different than human tissue due to differences in composition and form. The biometric identification and verification methods of the present invention can thus be used with or separately from the determination whether the sample is actual tissue or some other substance.

10 While utilizing the present invention, it has also been found that other spectral features observed in the tissue spectrum relate to the age and sex of the person being measured. It is believed that these features are due in part to the differences in dermal thickness between young and old people and between males and females. Such changes in skin thickness and composition affect the optical characteristics of the
15 tissue by affecting the scattering properties of the sample. These properties in turn impose distinct spectral shapes on the measured tissue spectra, which can be extracted and used by appropriate multivariate techniques to provide age and sex estimates.

Referring now to Figure 1, a perspective view of an embodiment of a typical optical sensor head of the present invention is shown. The sensor assembly 30
20 consists of a series or plurality of light sources 34 arranged in a selected manner on a sensor head 32, which also contains one or more detectors 36. The sensor assembly 30 may also include power conditioning electronics (not shown), which supply power to the light sources 34 and may also include signal processing electronics (not shown) which amplify the resulting signal from the detector 36. A multi-conductor cable 38
25 provides a means to power the sensor head and to transmit the detected signal back to the microprocessor or computer (not shown) that processes the spectral data.

The light sources 34 can be light emitting diodes (LEDs), laser diodes, vertical cavity surface emitting lasers (VCSELS), quartz tungsten halogen incandescent bulbs with optical pass-band filters with optical shutters, or a variety of other optical sources
30 known in the art. The light sources 34 can each have the same wavelength characteristics or can be comprised of sources with different center wavelengths in the spectral range from about 350 nm to about 2500 nm. In general, the collection of light sources 34 can include some sources that have the same wavelengths as others

and some sources that are different. In a preferred embodiment, the light sources 34 includes sets of LEDs, laser diodes, VCSELs, or other solid-state optoelectronic devices with differing wavelength characteristics that lie within the spectral range from about 350 nm to about 1100 nm.

5 The detector 36 can be a single element or it can be a one- or two-dimensional array of elements. The detector type and material is chosen to be appropriate to the source wavelengths and the measurement signal and timing requirements. These detectors can include PbS, PbSe, InSb, InGaAs, MCT, bolometers and micro-bolometer arrays. In a preferred embodiment where the light sources 34 are solid-
10 state optoelectronic devices operating in the spectral range from about 350 nm to about 1100 nm, the preferred detector material is silicon.

 The light sources 34 can be sequentially illuminated and extinguished to measure the tissue properties for each source by turning power to each of them on and off. Alternatively, multiple light sources 34 can be electronically modulated using
15 encoding methods that are known to one knowledgeable in the art. These encoding patterns include Fourier intensity modulation, Hadamard modulation, random modulation, and other modulation methods.

 Figure 2 shows a cross-sectional view of the sensor head 32 of Figure 1, for use in diffuse reflectance measurements. Also shown is the tissue 40 in contact with
20 the face 39 of the sensor head 32 and the mean optical paths 42, 44, 46, 48, 50, 52 of the light traveling from each light source 41, 43, 45, 47, 49, 51, respectively, to the detector 36. In acquiring tissue spectral data, measurements can be made in at least two different sampling modes. The optical geometry illustrated in Figure 2 is known as diffuse reflectance sampling geometry where the light sources and detector lie on
25 the same side of the tissue. An alternative method is known as transmission sampling, wherein light enters a thin tissue region such as an earlobe or a fingertip on one side and then is detected by a detector located on the other side of the tissue. Although light in such regions as the silicon-region can penetrate tissue to significant depths of one centimeter or more, depending upon the wavelength, transmission sampling of the
30 tissue limits the region of the body that can be used. Thus, while either mode of sampling is applicable to the present invention, and especially to analysis utilizing light in the silicon-region, a preferred and more versatile sampling method is based upon reflected light.

Referring to Figure 2, when the tissue is illuminated by a particular light source 41, the resulting signal detected by detector 36 contains information about the tissue optical properties along a path between the source 41 and detector 36. The actual path of any given photon is highly erratic due to effects of optical scattering by the tissue, but the mean optical path 42 is a more regular and smooth curve, as shown in the figure.

This mean optical path is, in general, different for different source-detector separation distances. If another light source 51 is located at the same distance from the detector 36 as light source 41 and the two light sources have the same wavelength characteristics, the resulting signals can be combined to increase the resulting signal-to-noise ratio of the measurement. If light source 51 has a different wavelength characteristic than light source 41 then, in general, the resulting signals provide unique and useful information about the tissue optical properties, especially as they relate to spectral biometric determinations and should be analyzed as distinct data points. In a similar manner, if two light sources have the same wavelength characteristics and are positioned at different distances from the detector 36 (for example light sources 41 and 43) then the resulting information in the two signals is different and the measurements should be recorded and analyzed as distinct data points. Differences in both wavelength characteristics and source-detector separation provide new and useful information about the optical characteristics of the tissue 40.

In general, the detector 36 can be located in the center of the sensor head or it can be offset to one side of the sensor head 32 in order to provide for greater source-detector separation distances. The sensor head 32 can be other shapes including oval, square and rectangular. The sensor head 32 can also have a compound curvature on the optical surface to match the profile of the device in which it is mounted.

Light that reflects from the topmost layer of skin does not contain significant information about the deeper tissue properties. In fact, reflections from the top surface of tissue (known as "specular" or "shunted" light) are detrimental to most optical measurements. For this reason, Figure 2 illustrates a sensor-head geometry wherein the detector 36 is recessed from the sensor surface 39 in optically opaque material 37 that makes up the body of the sensor head 32. The recessed placement of detector 36 minimizes the amount of light that can be detected after reflecting off the first (epidermal) surface of the tissue. It can be seen that the same optical blocking

effect could be produced by recessing each of the light sources, or by recessing both the detector and the light sources. Other equivalent means of optical blocking can be readily established by one of ordinary skill in the art.

Figure 3 shows a top view of the sensor head 32 with plurality light sources 34 and a single detector 36 visible. This figure is intended to be representative of configurations that allows for a variety of sources 34 and detectors 36 that have variable spacing between them. In general, this configuration is most applicable in cases where a small number of light sources 34 with different wavelength characteristics are available. In these cases, the variable distance between sources 34 and detector 36 are used to gather additional optical information from the tissue.

Referring to Figure 4, the light sources 34 can also be arranged to be equidistant from the detector 36. This configuration is most appropriate in cases where each light source 34 is a different wavelength and sufficient light sources can be obtained to achieve the desired accuracy results for the system. An example of this occurs when the individual light sources are the result of combining optical filters with one or more broad-band (e.g., incandescent) light sources. In this case, many unique wavelength bands can be defined and each of the sources 34 can be placed equidistant from the central detector 36.

An alternative embodiment of a variable source-detector configuration is illustrated in Figure 5, which schematically depicts a top view of a sensor 70 of this type. In this embodiment, the four different light sources 71, 74, 77, 80 are arranged around a common detector 83. Four different light sources 71, 74, 77, 80 are shown for illustration but fewer or more can be used in a particular embodiment. Each of the light sources 71, 74, 77, 80 is optically coupled to a different optical waveguide 72, 75, 78, 81. Each waveguide 72, 75, 78, 81 has individually controllable electronic or mechanical optical shutters 73, 76, 79, 82. These optical shutters 73, 76, 79, 81 can be individually controlled to encode the light by allowing light to enter the tissue from a waveguide 72, 75, 78, 81 at a predetermined position or positions. One method for implementing optical shutters is using micro-electromechanical systems (MEMS) structures, which is a technology well known to one of ordinary skill in the art. The light sources 71, 74, 77, 80 can be different LEDs, laser diodes or VCSELs. Alternatively, one or more incandescent sources with different optical filters can be used to generate light of different wavelength characteristics to couple into each of the waveguides 72,

75, 78, 81. As well, this MEMS aperture geometry could be used with other illumination sources and geometries illustrated in the other figures in this application.

Alternatively, multiple source-detector distances can also be achieved by using more than one detector element as shown in Figure 6. Figure 6 schematically depicts a top view of a sensor 80 of this type. In this embodiment, each of three different light sources 82, 84, 86 is positioned relative to three detectors 81, 83, 85 such that the spacing between a given light source and each of the detectors is different. For example, the source detector spacing for a light source 82 is shortest with respect to detector 85 and longest with respect to detector 83. By turning on the light sources 82, 84, 86 in a sequential or encoded pattern and measuring the response at each of the three detectors 81, 83, 85, the tissue characteristics for all of the available source-detector separations at all of the wavelengths can be measured.

The use of multiple detector elements and multiple illumination sources can be extended to using a detector array as shown in Figure 7. Figure 7 schematically depicts a top view of a sensor 90 of this type. In this embodiment, multiple light sources 92, 94, 96, 98 are placed at the perimeter of a detector array 99. The signal detected at each of the array elements then represents a different source-detector separation with respect to the light from a given light source. Many variants on this configuration exist including the use of one-dimensional (1-D) or two-dimensional (2-D) arrays, and placing sources within the array as well as on the periphery.

The detector(s) can be any material appropriate to the spectral region being detected. For light in the region from about 350 nm to about 1100 nm, a preferred detector material is silicon and can be implemented as a single-element device, a collection of discrete elements, or a 1-D or 2-D array, depending upon the system configuration and encoding method used. For light in the region from about 1.25 to about 2.5 μ m, a preferred detector material is InGaAs and can also be implemented as a single element, a collection of elements, or a 1-D or 2-D array. Additional detector materials and means of detection include InSb, Ge, MCT, PbS, PbSe, bolometers, and others known to one of ordinary skill in the art.

Once the light passing through the tissue is detected, the signals can be digitized and recorded by standard techniques. The recorded data can then be processed directly or converted into absorbance spectra or noised-scaled absorbance spectra as is known to one of ordinary skill in the art. The data can then be used for spectral identification or

verification by the methods described in U.S. Patent Application Serial No. 09/832,534, filed April 11, 2001, entitled "Apparatus and Method of Biometric Identification or Verification of Individuals using Optical Spectroscopy", and U.S. Patent Application Serial No. 09/415,594, filed October 8, 1999, entitled "Apparatus and Method for Identification of Individuals by Near-Infrared Spectrum".

A small spectral biometric subassembly, such as those discussed above, can be embedded in a variety of systems and applications. The spectral biometric reader can be configured as a dedicated system that is connected to a PC or a network interface, an ATM, securing an entryway, or allowing access to a particular piece of electronics such as a cellular phone. In this mode, one or more people can be enrolled in the biometric system and use a particular reader to gain access to a particular function or area.

Alternatively, the spectral biometric system can be configured as a personal biometric system that confirms the identity of the sole person authorized to use the device, and transmits this authorization to any properly equipped PC, ATM, entryway, or piece of electronics that requires access authorization. One advantage of this latter approach is that the personal biometric system can transmit an identifying code to the requesting unit and then use the biometric signal to confirm authorization, which implies that the system needs to perform a verification task rather than the more difficult identification task. Yet, from the user's perspective, the system recognizes the user without an explicit need to identify himself or herself. Thus, the system appears to operate in an identification mode, which is more convenient for the user.

An additional advantage of a personal biometric system is that if an unauthorized person is able to defeat the personal biometric system code for a particular biometric system-person combination, the personal biometric system can be reset or replaced to use a new identifying code and thus re-establish a secure biometric for the authorized person. This capability is in contrast to multi-person biometric systems that base their authorization solely on a biometric signature (spectral, as well as any of the other biometric techniques such as fingerprint, iris, facial, etc.). In this latter case, if an intruder is able to compromise the system by somehow imitating the signal from an authorized user, there is no capability to change the biometric code since it is based solely on a fixed physiological characteristic of a person.

Figure 8 shows one embodiment of a personal spectral biometric system 100 in the configuration of an electronic key fob 102. The equidistant sensor configuration of

Figure 4 is shown for illustration purposes only. Any of the disclosed sensor configurations are application in the electronic key fob. The illumination 104 and detection system 106 are built into the fob 102, as is the means to collect and digitize the spectral information. In one embodiment, short-range wireless techniques based upon
5 RF signals 103 can be transmitted to communicate between the fob and a corresponding reader (not shown) that allows access to the PC, entryway, etc. In another embodiment, an infrared optical signal can be used to transmit the information between the fob and the reader. In another embodiment, a direct electrical connection is established between the personal biometric system and the reader. The actual comparison between the measured
10 spectral data and the previously recorded enrollment spectrum (template) can be made either within the fob or at the reader. In the former case, the logical operations necessary to perform the comparison are done within the fob and then a simple confirmed or denied signal is transmitted to the reader. In the latter case, the most recent measured spectrum is transmitted to the reader and the comparison and decision is accomplished at
15 the reader or at a host to which the reader is connected. In either case, the communication between the fob and the reader needs to be performed in a secure manner to avoid interception and unauthorized use of the system. Methods for ensuring secure communication between two devices are well known to one of ordinary skill in the art.

20 A second embodiment of a personal spectral biometric system 110 is depicted in Figure 9. In this case, the biometric reader 111 is built into the case of a watch 112 and operates based upon signals detected from the skin in the area of the wrist. The operation of this system is identical to the operation described for the biometric fob. Figure 10 shows the equidistant-sensor geometry of Figure 4 for illustration purposes
25 only. Any of the sensor geometries previously disclosed can be used in this application.

In addition to the watch or fob, similar biometric capability can be built into other personal electronic devices. These devices include personal digital assistants (PDAs) and cellular telephones. In each case, the personal biometric system can provide user authorization to access both the device in which it is installed, as well as to provide
30 authorization for mobile commerce (M-Commerce) or other wireless transactions that the device is capable of performing.

The compact sensors disclosed can also be put into firearms to prevent unauthorized usage. In particular, the biometric sensor could be placed in the handgrip

of a weapon such as a handgun or other firearm to sense tissue properties while the gun is being held in a normal manner. A further capability of the apparatuses and methods disclosed in this application is the ability to identify people who are to be explicitly excluded from accessing protected property as well as determining those who are authorized to access the property. This capability will improve the biometric performance of the system with respect to those unauthorized people who are known to attempt to use the device, which could be particularly important in the case of a personal handgun. In particular, parents who own a biometrically enabled handgun can enroll themselves as authorized users and also can enroll their children as explicitly unauthorized users. In this way, parents could have further insurance that children who are known to be in the same household as a gun will not be able to use it.

It is also possible to use the explicit-denial capability of a biometric system in a fixed installation such as a home, place of business, or an automobile. For example, a biometric system installed at the entryway of a place of business can be used to admit authorized employees and temporary workers. If an employee is fired or the term of the temporary employee expires, then their enrollment data can be shifted from the authorized to the unauthorized database, and an explicit check is made to deny access to the former employee if he or she attempts to enter.

Because of the nature of optical spectroscopy, it is difficult to generate spectra of similar shape and absorbance characteristics without using similar material for the sample. For this reason, many common materials, such as latex and wax that are used to defeat other biometric systems such as fingerprint readers or hand geometry systems are ineffective tissue surrogates for a spectral biometric system. By performing a spectral comparison, most non-tissue samples will be rejected, resulting in a strong countermeasure capability against potential intruders.

Similarly, many of the spectral features that are present in the wavelength ranges disclosed by this invention are indicative of living tissue. These features include oxy- and deoxy-hemoglobin bands, temperature effects, intracellular hydration, and others. These effects contribute to the overall spectral signature of the sample being measured and ensure that a matching sample is one that is part of a living person and normally perfused. Thus, a good spectral comparison ensures the "liveness" of a sample and deters the use of dead or excised tissue as a means to circumvent the spectral biometric system.

In some applications, such as Internet access authorization, it may be useful to be able to verify the sex and/or age of the person using the spectral biometric system. Because of both age- and sex-specific difference in skin structure and composition, the optical spectra change in systematic and indicative ways such that the age and sex can be
5 estimated using the biometric spectral data.

In practicing the present invention, the tissue spectral data is determined by measuring the light intensity received by the output sensor for the various light sources which give indications of the optical properties of the tissue at different wavelengths and/or at different source-detector separations. As is well known to one
10 of ordinary skill in the art, the signal produced by the detector in response to the incident light levels can be converted into spectral data that can be recorded and used for subsequent analysis for enrollment or authorization of identity.

Experimental Results

A laboratory experiment was performed to test and confirm the premise that
15 discrete wavelength light sources could be used for biometric determination tasks and that further advantage could be gained by arranging the same sources with different source-detector spacings. Figure 10 shows a schematic of the laboratory system that was used in this experiment. This system used an illumination subsystem 100 that incorporated a 100W quartz tungsten halogen bulb 102 and some optical filters 104 to
20 transmit light in the 1.25 to 2.5 μ m spectral range. The light was directed into a fiber-optic optical sampler 106, which was used to take diffuse reflectance optical measurements of the volar surface of the forearm. Diffusely reflected light collected by the sampler 106 was then directed into a Fourier transform infrared (FTIR) spectrometer 108 and detected by an extended range indium gallium arsenide (InGaAs) detector 110.
25 The spectrometer was a Perkin Elmer 2000 FTIR operating with a spectral resolution of 16cm⁻¹. The resulting interferogram data were digitized, stored and converted to spectral data using techniques well known to one of ordinary skill in the art.

The optical sampler 106 included a sample head 120 which was capable of collecting tissue spectral data using two different source-detector spacings. Figure 11
30 shows a top view of the optical sampler or sample head 120 including three different optical fiber groupings: an outer ring 121, an inner ring 122 and a central bundle 123. The outer ring of optical fibers 121 and inner ring of optical fibers 122 were used to illuminate the tissue and the central bundle of fibers 123 was used to collect the diffusely

reflected light. An optical switch (not shown) was built into the optical sampler subsystem such that either the outer ring of optical fibers 121 or the inner ring of optical fibers 122 was illuminating the tissue at any one time. The center-to-center spacing of the inner ring fibers 122 to the center detection bundle 123 was approximately 0.5 mm while the outer ring 121 separation was approximately 0.7mm. Thus, spectra collected when the outer ring was illuminating the tissue had a longer and deeper average path length than spectra collected with inner ring 122 illumination. The optical system was set up so spectra were collected alternately using inner and outer illumination closely spaced in time.

Twenty-two diabetic subjects participated in a study, which spanned a total duration of 16 weeks. Each person in the study was measured during two separate visits per week for each of the first 7 weeks of the study. There was then an 8-week gap, followed by one additional week of study where each person again was measured during two separate visits. During each measurement visit, multiple (5) optical samples were collected from the underside of their left forearm. Each optical sample consisted of 90 seconds of measurement time.

The optical samples collected by the sampler shown in Figure 11 were used to simulate a discrete source configuration similar to that shown in Figure 3. Although the system shown in Figure 11 is a broadband illumination system, the spectral data collected on this laboratory system were post-processed to emulate a discrete wavelength system. A small number of uniformly spaced, discrete spectral elements (variously 4, 6, 10, or 20) were selected from the continuous spectral data and used for subsequent biometric analysis using the same type of analysis described previously. The biometric determinations were made in a manner very similar to the technique described in U.S. Patent Application Serial No. 09/832,534, filed April 11, 2001, entitled "Apparatus and Method of Biometric Identification or Verification of Individuals using Optical Spectroscopy". In particular, the biometric analysis was performed by randomly selecting a small number of subjects' data as from authorized users ("validation"), a different small subset as non-authorized users ("intruders"), and the remaining subjects' data were used to build a calibration set. Due to the relatively small number of subjects, the analysis used six random subjects for validation and two as intruders. This analysis was repeated 10 times and output was pooled to achieve stable results.

The calibration data were processed to produce generic data as described in U.S. Patent No. 6,157,041, entitled "Methods and Apparatus for Tailoring Spectroscopic Calibration Models". A PCA decomposition of these data was performed to generate 50 eigenvectors and scores. The scores were then analyzed to
5 determine the 20 factors that had the largest values for the ratio of the between-person variation to the within-person variation for each set of scores.

The first two samples for each of the validation subject's data were averaged and used as the initial enrollment spectra. Each of the remaining validation spectra were taken in temporal sequence and subtracted from the enrollment spectrum. This spectral
10 difference was then presented to the selected calibration factors and a Mahalanobis distance was calculated. If the Mahalanobis distance was below a certain threshold value, the validation spectrum was deemed valid, and a weighted sum of the validation spectrum (0.2) and the enrollment spectrum (0.8) was used to update the enrollment spectrum. This process was repeated for multiple threshold values. One of ordinary
15 skill in the art will recognize that the Spectral F-Ratio could be used instead of or in conjunction with the Mahalanobis distance metric to perform the identity determinations. The intruder data was processed in a similar manner as the validation data using the same threshold values.

This analysis was applied to spectral data from inner ring illumination, from
20 outer-ring illumination, and to a data set that concatenated the selected data from both inner- and outer-ring illumination. This latter case simulated the condition where one pair of some number, N, of different discrete sources were used for illumination at two different source-detector distances and data were collected for each of the 2N sources separately.

25 The results of this analysis are shown in Figures 12 and 13. Figure 12 depicts the receiver-operator characteristic (ROC) curves for the case where 20 of the spectral elements were used for biometric identification tasks. The equal error rate (EER, defined as the false acceptance rate = false rejection rate) of the inner-ring data is 2.0% while the outer-ring data yields an EER of 1.6%. In contrast, a spectral data set made up
30 of both of the inner- and outer-ring spectral elements gives an improved EER of 0.7%. Figure 13 shows the EER for all three sampling conditions for cases where 4,6,10, and 20 elements are used for analysis. In all cases, the combined-ring data performs much better than either of the separate channels, indicating that additional biometric

information is available by using the same wavelengths to measure tissue with multiple source-detector separations.

The ability to assess age using spectral data was tested using the NIR spectra from a multi-person study that was conducted using a laboratory-grade FTIR system similar to that shown in Figures 10 and 11. However, the light source 102 was a 40W quartz tungsten halogen bulb, the FTIR spectrometer 108 was a Bomem WorkIR, and the optical sampler 106 consisted of a just a single illumination ring and a central detector fiber bundle similar to the inner ring 122 and central bundle 123 shown in Figure 11.

The data were collected from 87 diabetic people who participated in a portion of a 17-week study. Approximately half of the people participated in the study for 6 weeks and half participated for 11 weeks. In either case, each person was measured during two separate visits per week for each week they participated in the study. During each measurement visit, multiple (3-5) optical samples were collected from the underside of their left forearm. Each optical sample consisted of 90 seconds of measurement time. A total of more than 5100 optical samples were collected on this study group. The resulting intensity spectra were log-transformed to pseudo-absorbance data and a scale function was applied to the spectra to make the spectral noise characteristics uniform. Standard outlier metrics (Mahalanobis Distance and Spectral F-Ratio) were applied to the resulting scaled absorbance data to remove outlying spectra before subsequent processing.

The scaled absorbance spectra and the corresponding ages of the subject were used in conjunction with the partial least squares (PLS) multivariate calibration algorithm to determine the age-prediction accuracy. A person-out cross validation was performed, giving the results shown in Figure 14 where "SEP" is standard error of prediction, which is a one-standard-deviation measure of the error. It can be seen that age predictions with an SEP better than 6 years is possible based upon NIR tissue spectra.

A similar multivariate analysis was performed to determine sex prediction capability. In this case, each of the NIR spectra from the 87 subjects was assigned a reference value of either 0 or 1 based upon the sex of the person from whom the spectrum was measured. These spectral data and reference values were then processed using PLS and a subject-out cross-validation to determine sex predictions. Predicted

values greater than 0.5 were assigned a value of 1 and predictions less than 0.5 were assigned a 0. The results of this analysis are given in Figure 15, where it can be seen that approximately 85% of the spectra yielded accurate sex predictions. In some of these cases, the raw predictions were close to the threshold value of 0.5, which implies they
5 were suspect and ambiguous. If those predictions closest to the threshold are eliminated as ambiguous, the prediction ability on the remaining samples is improved. Figure 16 shows how the prediction ability improves as a function of how often a spectrum is considered ambiguous.

The ability of a spectral biometric to discriminate between live tissue and other
10 sample types is shown in Figures 17 and 18. The experiment that gave these results was based on a demonstration that was set up to perform an identification task among a small group of enrolled people. In this experiment, several persons enrolled as valid users on a system similar to the one described in the NIR 87 person analysis section, above. One of the valid users then presented themselves to the system along with another person who
15 was not enrolled in the system. As well, a latex glove was filled with a saline solution and used to collect another test sample. Finally, a piece of cowhide was also measured on the system as a test sample. The results of this experiment are shown in Figure 17, where it can be seen that the latex glove produces severely inflated matching metrics. Figure 18 shows a blow-up of Figure 18, where it can also be seen that even a closely
20 matched tissue sample such as the cowhide produces greatly inflated results. The sample taken from the person who is authorized matches best, while the unauthorized person's sample shows a marked inflation relative to the other valid user's sample.

New characteristics and advantages of the invention covered by this document have been set forth in the foregoing description. It will be understood, however, that
25 this disclosure is, in many respects, only illustrative. Changes may be made in details, particularly in matters of shape, size, and arrangement of parts, without exceeding the scope of the invention. The scope of the invention is, of course, defined in the language in which the appended claims are expressed.

What is claimed is:

1. A system for collecting spectral information from tissue for performing biometric determination tasks comprising:
 - a plurality of discrete light sources;
 - means to encode the light sources;
 - means to direct the light into the tissue;
 - means to detect light that has substantially passed through sub-surface tissue;
 - means to record and store the resulting detector signals; and
 - means for processing the resulting spectral data to perform a biometric determination.
2. The system as recited in claim 1, wherein said light sources are light emitting diodes.
3. The system as recited in claim 1, wherein said light sources are laser diodes.
4. The system as recited in claim 1, wherein said light sources are vertical cavity surface emitting lasers (VCSELs).
5. The system as recited in claim 1, wherein said light sources are based on one or more incandescent sources coupled to a plurality of optical filters.
6. The system as recited in claim 1, wherein said means to encode the light sources is electronic.
7. The system as recited in claim 1, wherein said means to encode the light sources is electromechanical.
8. The system as recited in claim 7, wherein said electromechanical means of encoding is a micro electromechanical system (MEMS) assembly.

9. The system as recited in claim 1, wherein said means to encode the light sources is mechanical.

10. The system as recited in claim 1, wherein said encoding causes a sequential series of single light sources to illuminate the tissue during the tissue sampling interval.

11. The system as recited in claim 1, wherein said encoding causes combinations of light sources to illuminate the tissue during the sampling interval.

12. The system as recited in claim 1, wherein said means to direct the light into the tissue causes the light to enter the tissue at substantially the same source-detector distance for all combinations of sources and detectors.

13. The system as recited in claim 1, wherein said means to direct the light into the tissue causes the light to enter the tissue at substantially different source-detector distances for some combinations of sources and detectors.

14. The system as recited in claim 1, wherein said tissue is skin.

15. The system as recited in claim 1, wherein said means to detect light is a single-element detector.

16. The system as recited in claim 15, wherein said single element detector is a silicon detector.

17. The system as recited in claim 15, wherein said single element detector is an indium gallium arsenide detector.

18. The system as recited in claim 15, wherein said single element detector is an lead sulfide detector.

19. The system as recited in claim 15, wherein said single element detector is a bolometer.

20. The system as recited in claim 1, wherein said means to detect light is a detector array.

21. The system as recited in claim 20, wherein said detector array is a silicon detector array.

22. The system as recited in claim 1, wherein said detected light is diffusely reflected from the tissue.

23. The system as recited in claim 1, wherein said detected light is transmitted through the tissue.

24. The system as recited in claim 1, wherein said biometric determination is an identification task.

25. The system as recited in claim 1, wherein said biometric determination is a identity verification task.

26. The system as recited in claim 1, wherein said biometric determination is an age estimation task.

27. The system as recited in claim 1, wherein said biometric determination is a sex estimation task.

28. The system as recited in claim 1, wherein said biometric determination is a liveness determination task.

29. The system as recited in claim 1, wherein said biometric determination is an authentic-sample determination task.

30. An illumination system for collecting spectral information from tissue for performing biometric determination tasks comprising:

a plurality of discrete light sources; and
means to encode the intensity of the light sources.

31. The system as recited in claim 30, wherein said light sources are all substantially the same distance from a common point.

32. The system as recited in claim 31, wherein said light sources are light emitting diodes.

33. The system as recited in claim 31, wherein said light sources are laser diodes.

34. The system as recited in claim 31, wherein said light sources are vertical cavity surface emitting lasers.

35. The system as recited in claim 31, wherein said light sources are optical filters coupled to one or more incandescent light sources.

36. The system as recited in claim 30, wherein said light sources are arranged to be at two or more substantially different distances from a common point.

37. The system as recited in claim 36 wherein said light sources are light emitting diodes.

38. The system as recited in claim 36 wherein said light sources are laser diodes.

39. The system as recited in claim 36 wherein said light sources are vertical cavity surface emitting lasers.

40. The system as recited in claim 36 wherein said light sources are optical filters coupled to one or more incandescent light sources.

41. The system as recited in claim 30, wherein said means to encode the light sources is electronic.

42. The system as recited in claim 31, wherein said means to encode the light sources is electromechanical.

43. The system as recited in claim 42, wherein said electromechanical means of encoding is a micro electromechanical system (MEMS) assembly.

44. The system as recited in claim 31, wherein said means to encode the light sources is mechanical.

45. A method for performing a biometric determination task using tissue spectral data, said spectral data having a number of measurement values, comprising the steps of:

obtaining target tissue spectral data from said target individual using illumination from a number of discrete light sources; and

processing said target tissue spectral data using multivariate algorithms to produce a biometric determination.

46. The method recited in claim 45 wherein said spectral data represents a single source-detector separation distance.

47. The method recited in claim 45 wherein said spectral data represents a plurality of source-detector separation distances.

48. The method recited in claim 45 wherein said biometric determination is an identification task.

49. The method recited in claim 45 wherein said biometric determination is an identity verification task.

50. The method recited in claim 45 wherein said biometric determination is an age estimation task.

51. The method recited in claim 45 wherein said biometric determination is a sex estimation task.

52. The method recited in claim 45 wherein said biometric determination is a liveness determination task.

53. The method recited in claim 45 wherein said biometric determination is a sample authenticity task.

54. A personal identification system for performing biometric determination tasks to enable access to protected property, comprising:

a personal device;

a spectral biometric sensor;

means for processing the resulting spectral data to perform a biometric determination; and

means to authorize access or deny access to the protected property in accordance with the results of the biometric determination.

55. A system as recited in claim 54, wherein the personal device is a personal digital assistant.

56. A system as recited in claim 54, wherein the personal device is a cellular telephone.

57. A system as recited in claim 54, wherein the personal device is a wristwatch.

58. A system as recited in claim 54, wherein the personal device is an electronic fob.

59. A system as recited in claim 54, wherein the personal device is a smart card.

60. A system as recited in claim 54, wherein the personal device is a firearm.

61. A method for limiting access to protected property using a biometric sensor comprising steps of:

collecting biometric enrollment data from known unauthorized people;

collecting target biometric data from target people;

comparing said target biometric data to said unauthorized enrollment data; and

denying access to said protected property if match between said target biometric data and said unauthorized enrollment data is determined.

62. The method recited in claim 61, wherein said biometric sensor is a spectral biometric sensor.

63. The method recited in claim 61, wherein said protected property is a weapon.

64. The method recited in claim 63, wherein said weapon is a firearm.

1/14

Fig. 1

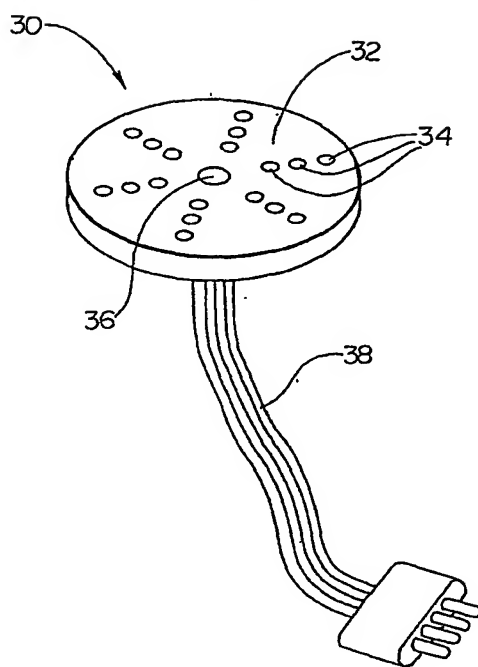


Fig. 2

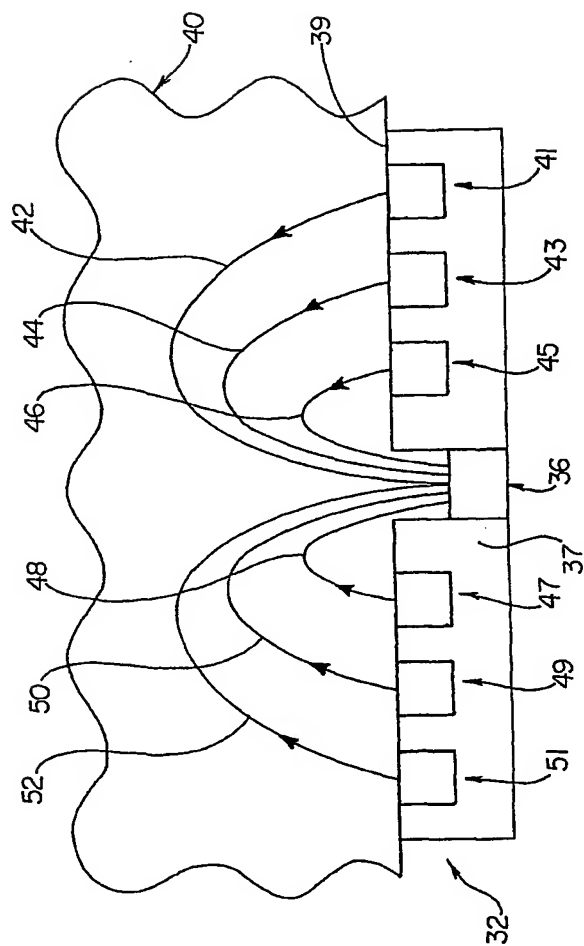



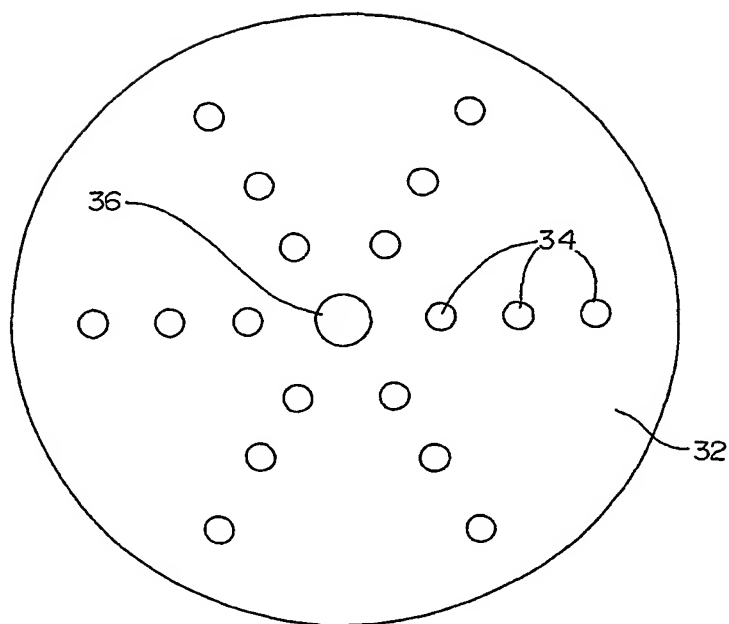
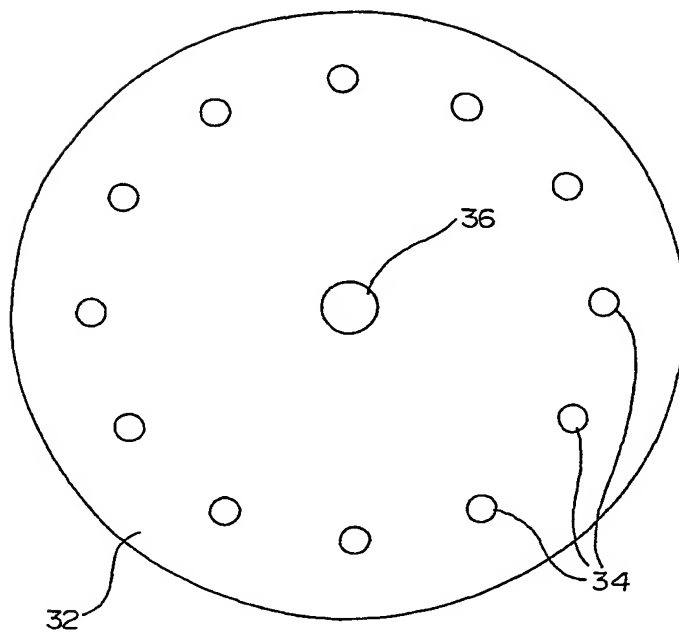
Fig. 3

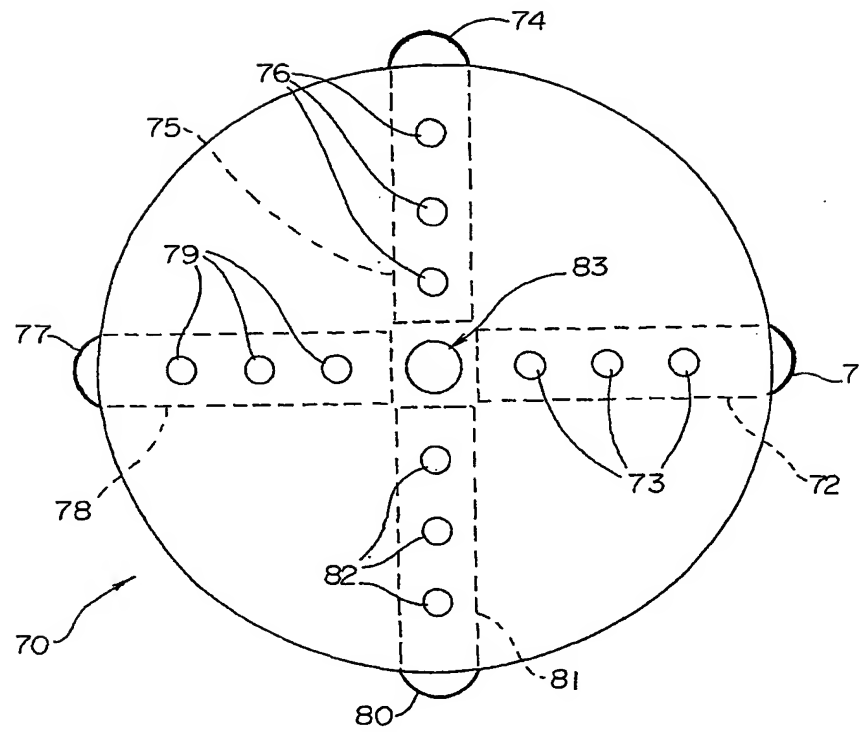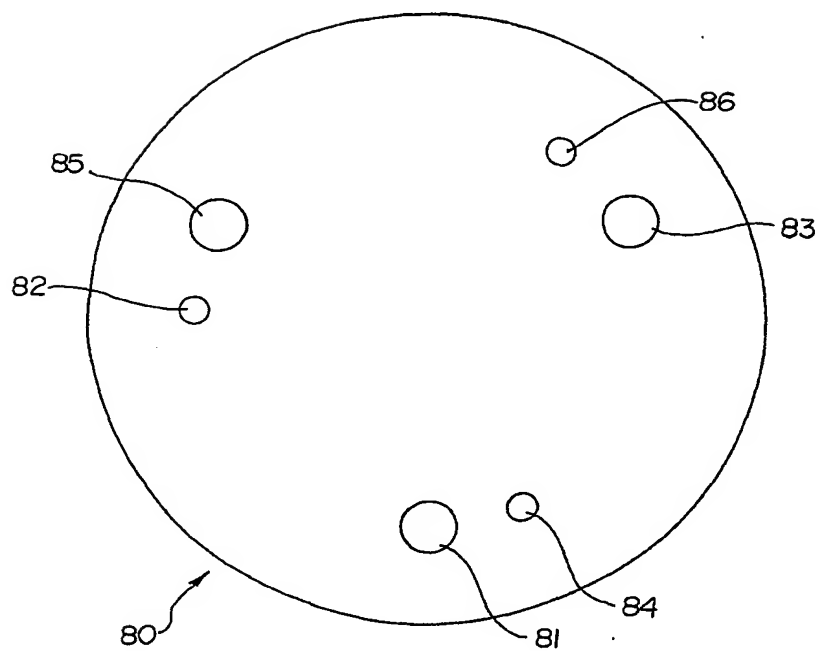
Fig. 4



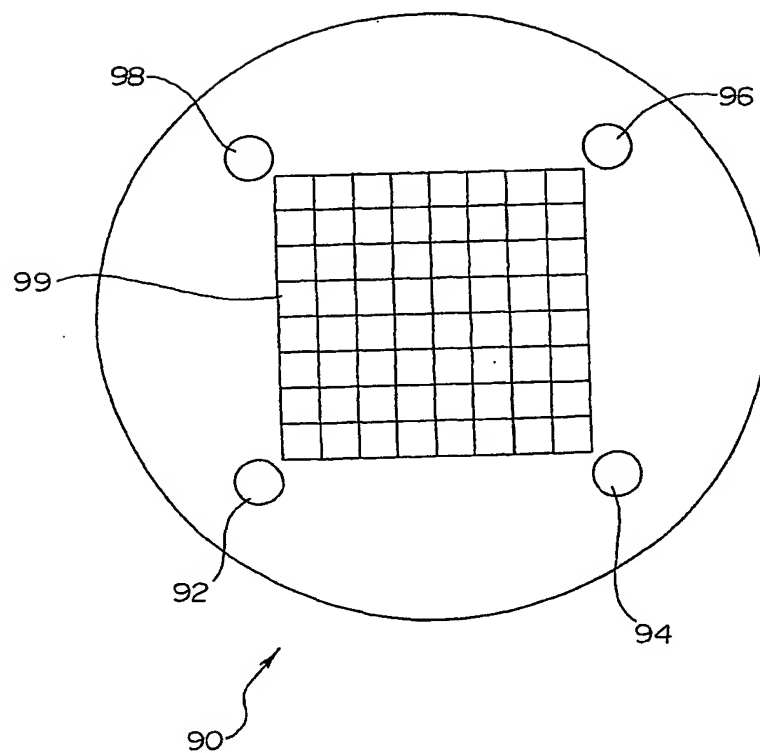
5/14

Fig. 5


6/14

Fig. 6

7/14


Fig. 7

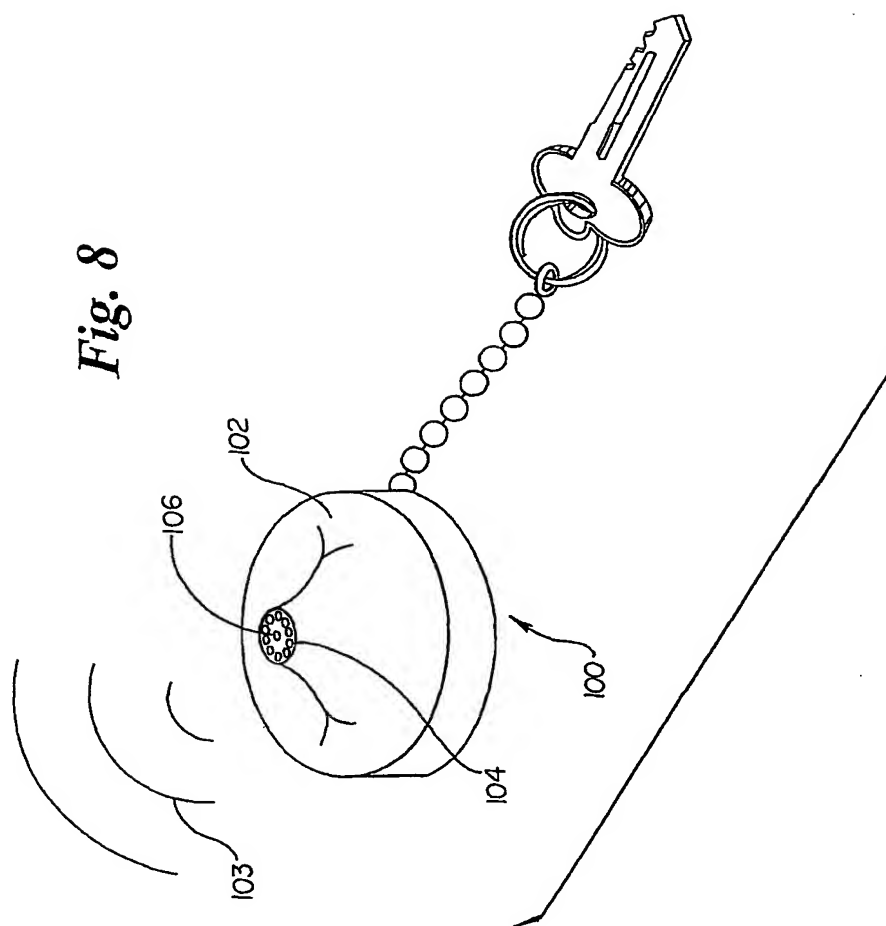8/14




9/14

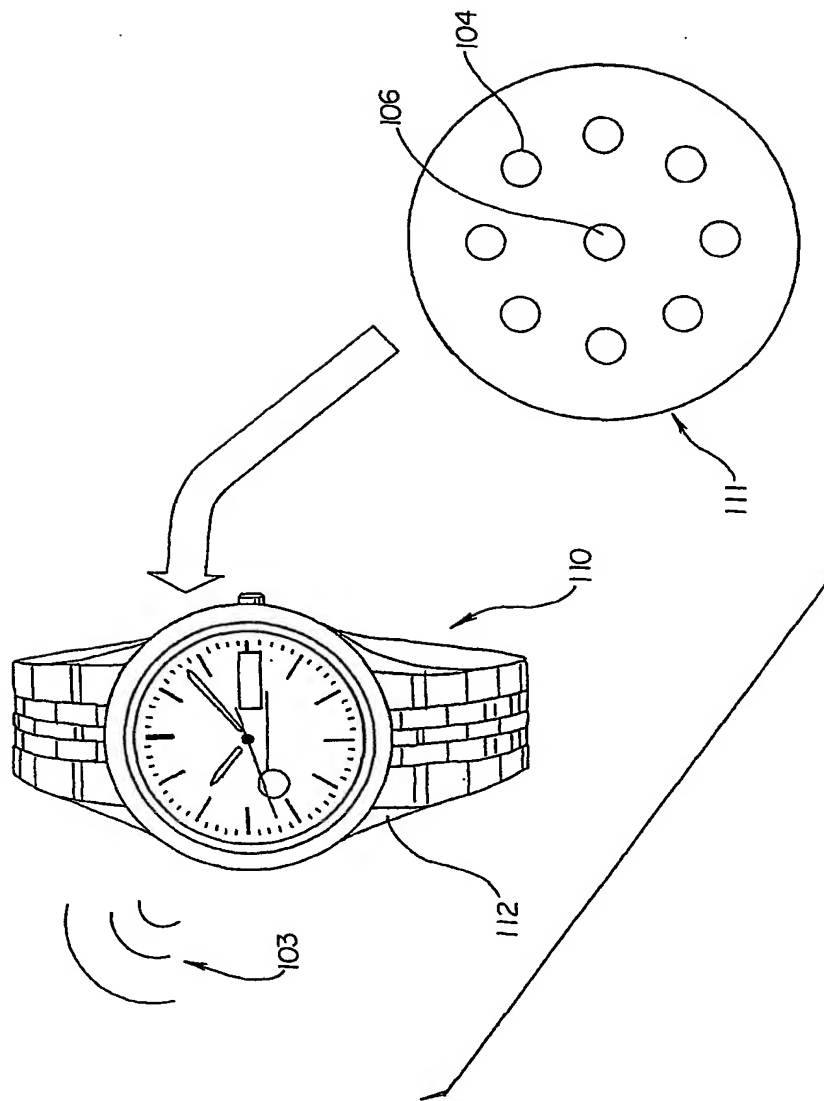Fig. 9





10/14

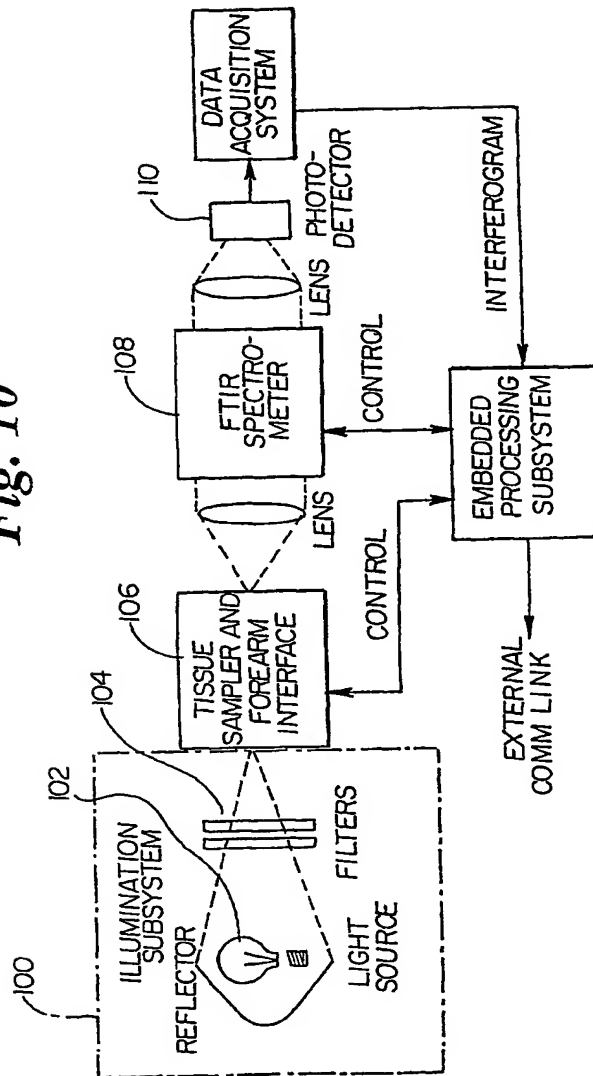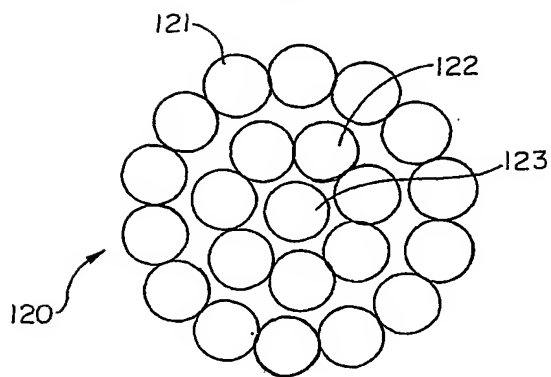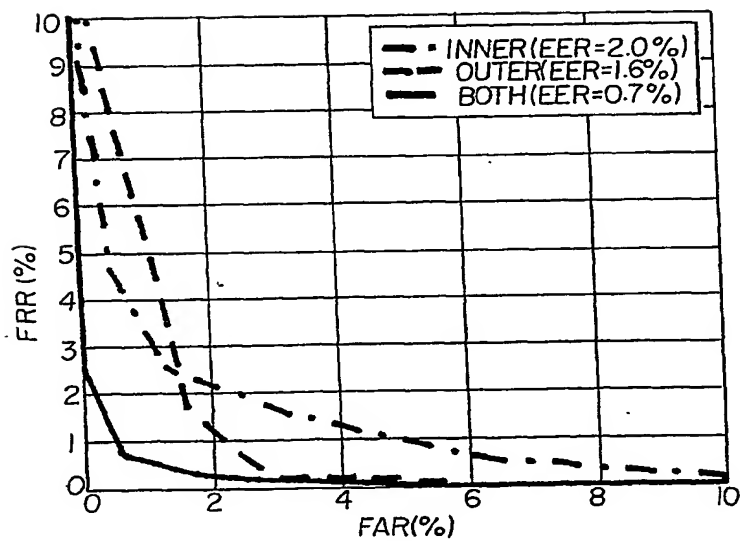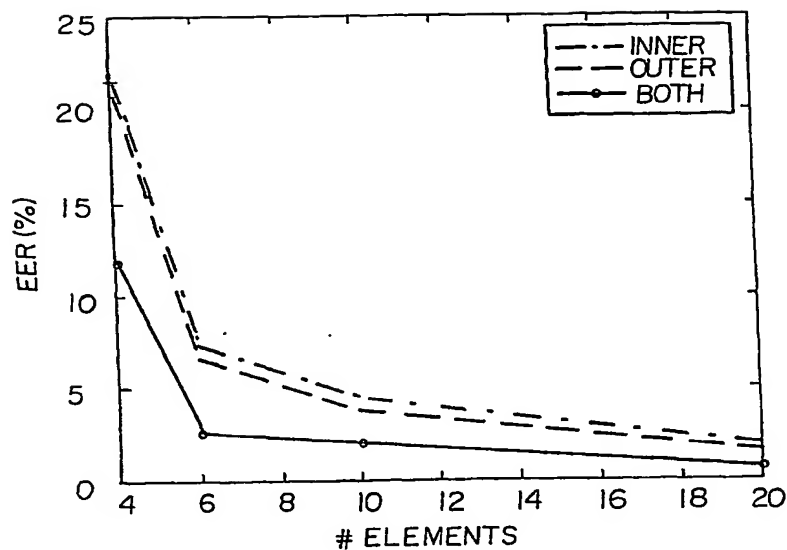
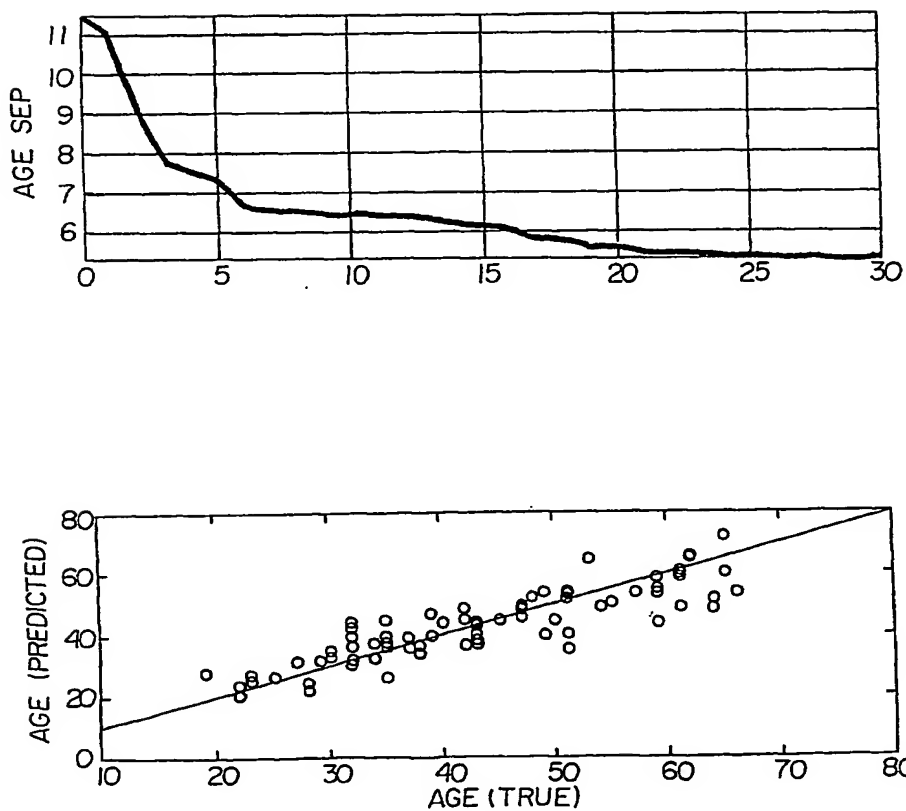
Fig. 10



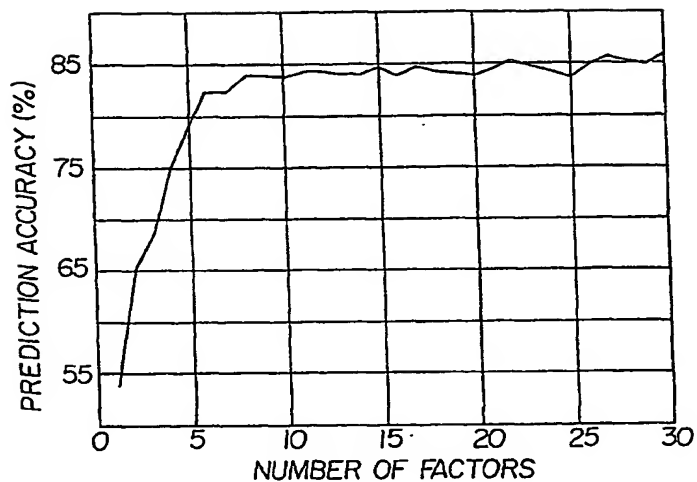
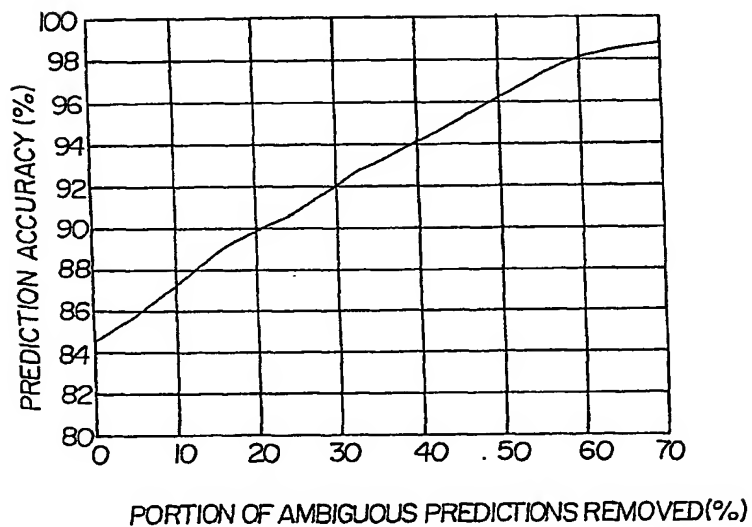
11/14

Fig. 11*Fig. 12*

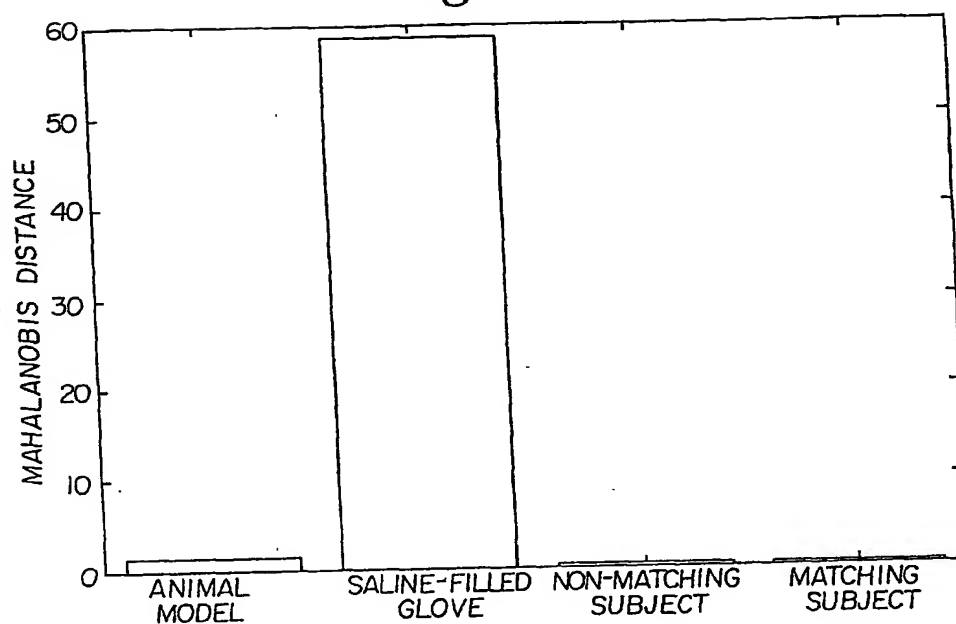
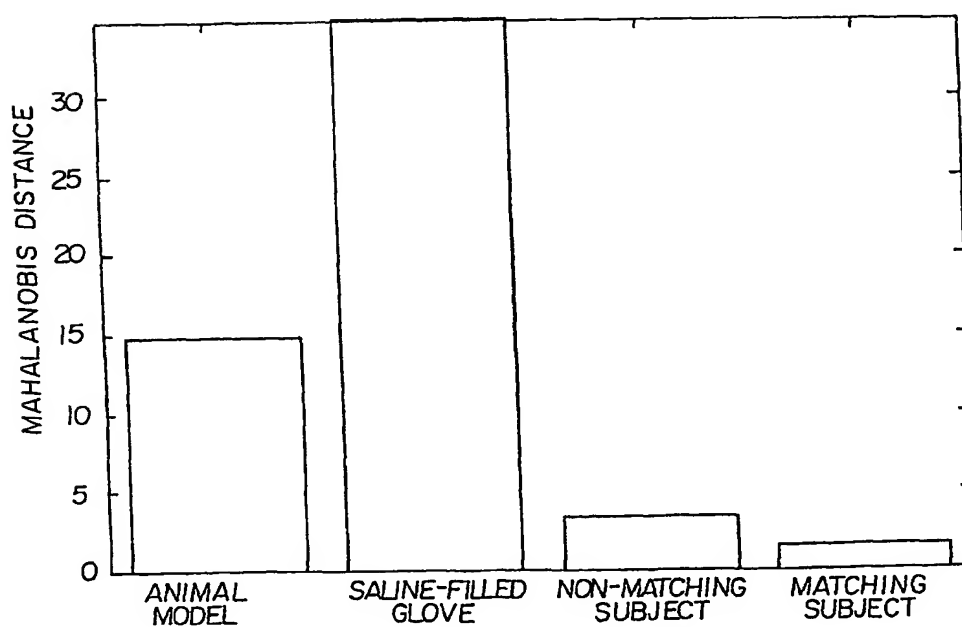
12/14

Fig. 13*Fig. 14*

13/14

Fig. 15*Fig. 16*

14/14

Fig. 17*Fig. 18*

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 December 2002 (12.12.2002)

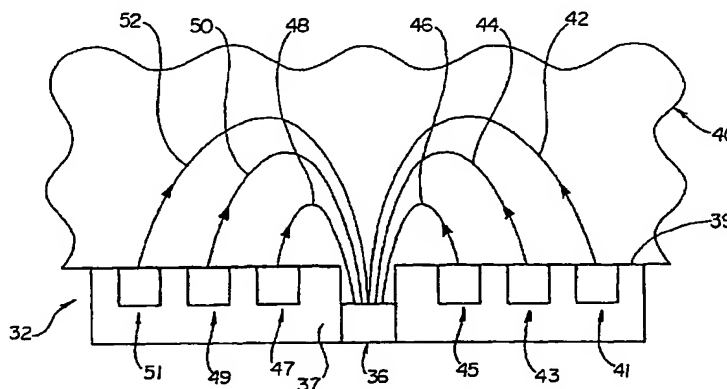
PCT

(10) International Publication Number
WO 02/099393 A3

- (51) International Patent Classification⁷: **A61B 5/117**, G06K 9/00, G07C 9/00
- (21) International Application Number: **PCT/US02/01091**
- (22) International Filing Date: 15 January 2002 (15.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/874,740 5 June 2001 (05.06.2001) US
- (71) Applicant: **RIO GRANDE MEDICAL TECHNOLOGIES, INC.** [US/US]; Suite 217, 800 Bradbury S.E., Albuquerque, NM 87106 (US).
- (72) Inventors: **ROWE, Robert, K.**; 229 Ashley Lane, Corrales, NM 87048 (US). **CORCORAN, Stephen, P.**; 437 Alamos Road, Corrales, NM 87048 (US). **HENDEE, Shonn, P.**; 12205 San Victorio N.E., Albuquerque, NM 87111 (US).
- (74) Agents: **CROMPTON, David, M.** et al.; Crompton, Seager & Tufte, LLC, Suite 895, 331 Second Avenue South, Minneapolis, MN 55401-2246 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: APPARATUS AND METHOD OF BIOMETRIC DETERMINATION ON THE BASIS OF SPECTRAL OPTICAL MEASUREMENTS



(57) Abstract: Methods and apparatus for performing biometric determinations using optical spectroscopy of tissue (40). The biometric determinations that are disclosed include determination or verifications of identity, estimation of age, estimation of sex, determination of sample liveness and sample authenticity. The apparatuses disclosed are based upon discrete light sources (41, 43, 45, 47, 49, 51) such as light emitting diodes, laser diodes, vertical cavity surface emitting lasers, and broadband sources with multiple narrow-band optical filters. The multiple light sources are encoded in a manner that the tissue response for each source can be efficiently measured. The light sources are preferably spaced at multiple distances from a detector (36) to contribute differing information to the biometric determination task as do light sources with different wavelength characteristics. Apparatuses are disclosed that incorporate a spectral biometric sensor with a personal electronic device such as cellular telephones, personal digital assistants, wristwatches, electronic fobs for the purpose of providing secure biometric access to protected property.



(88) Date of publication of the international search report:
27 February 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

onal Application No

PCT/US 02/01091

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61B5/117 G06K9/00 G07C9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B G06K G07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX, BIOSIS, IBM-TDB

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 27882 A (RIO GRANDE MEDICAL TECHNOLOGIE) 19 April 2001 (2001-04-19)	1-3, 5, 6, 10, 12, 14-18, 20-25, 45, 46, 48, 49, 54-60, 62
A	* page 4, line 14 - page 6, line 25; page 10, lines 16-24; figure 1 *	26-29, 47, 50-53
	— -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

3 September 2002

Date of mailing of the international search report

11/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Hoogen, R

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/01091

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 069 689 A (PALCIC BRANKO ET AL) 30 May 2000 (2000-05-30)	30-33, 35, 41
Y	* column 5, lines 7-14; column 9, lines 27-30; figure 15 *	1-3, 5, 6, 10, 12, 14-18, 20-25, 45, 46, 48, 49
A		4, 7-9, 11, 13, 34, 36-40, 42-44
Y	US 5 257 086 A (FATELEY WILLIAM G ET AL) 26 October 1993 (1993-10-26) cited in the application	15-18
A	* column 3, lines 58-63 *	19
Y	EP 0 924 656 A (TRW INC) 23 June 1999 (1999-06-23) cited in the application * paragraph 9 *	54-60
Y	WO 01 18332 A (SIEMENS AG ;FUENFGELDER HELMUT (DE)) 15 March 2001 (2001-03-15) the whole document	55-57, 59, 60
X	EP 0 897 164 A (IBM) 17 February 1999 (1999-02-17)	61
Y	* column 1, lines 3-8; column 5, lines 48-55; column 6, lines 11-22 *	62
A		63, 64

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/01091

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0127882	A	19-04-2001	AU 7334900 A EP 1217948 A2 NO 20021646 A WO 0127882 A2 US 2002009213 A1	23-04-2001 03-07-2002 08-04-2002 19-04-2001 24-01-2002
US 6069689	A	30-05-2000	US 6008889 A AU 7021198 A WO 9846133 A1	28-12-1999 11-11-1998 22-10-1998
US 5257086	A	26-10-1993	AU 2681892 A EP 0694159 A1 WO 9325876 A1	04-01-1994 31-01-1996 23-12-1993
EP 0924656	A	23-06-1999	US 6041410 A EP 0924656 A2 JP 3222110 B2 JP 11265432 A	21-03-2000 23-06-1999 22-10-2001 28-09-1999
WO 0118332	A	15-03-2001	WO 0118332 A1	15-03-2001
EP 0897164	A	17-02-1999	US 6246751 B1 CN 1213923 A EP 0897164 A2 JP 3030281 B2 JP 11168561 A	12-06-2001 14-04-1999 17-02-1999 10-04-2000 22-06-1999